

**The Mackenzie Dynavox  
Digital Autoload Message On-Hold System  
Model DV-2000 & DV-2000 PRO**

**EJECT / RECORD STOP PUSH-BUTTON:**

This ejects the tape when the system is playing a message. If pressed during the recording process the recording will be stopped.

**TAPE EJECTED LED:**

Yellow light on indicates there is no cassette inserted. Insert cassette, yellow light off = cassette in place, will start memory loading.

**RECORDING LED:**

Used to determine tape loading mode. Red light on, indicates message (s) is being loaded into memory

**M-O-H LED:**

This green LED is on when the system is playing a Pre-Recorded message.

**SPEAKER PUSH-BUTTON:**

Local Monitor ON/OFF

**POWER:**

Insert power adapter supplied.

**APHEX:**

Adjusts the amount of high frequency enhancement necessary to deliver the best overall system performance.

**LINE OUT:**


Audio output level at of to +4dB into 600  $\Omega$ , this is a standard level for most applications.

**SPKR OUT:**

Audio output level at up to 1.5W into 8  $\Omega$  use this output if more drive is needed to reach a more comfortable listening level.

**NOTE:**

It is recommended That you leave the Cassette Tape in the system for auto download operation. Insert Pre-Recorded tape Cassette as shown ( Tape Label, Facing Up ), system will rewind tape then start loading ( Red LED is on ) at the end of downloading the message, the Red LED will turn off, system will rewind the tape. It will automatically start playing the message from the digital audio memory.

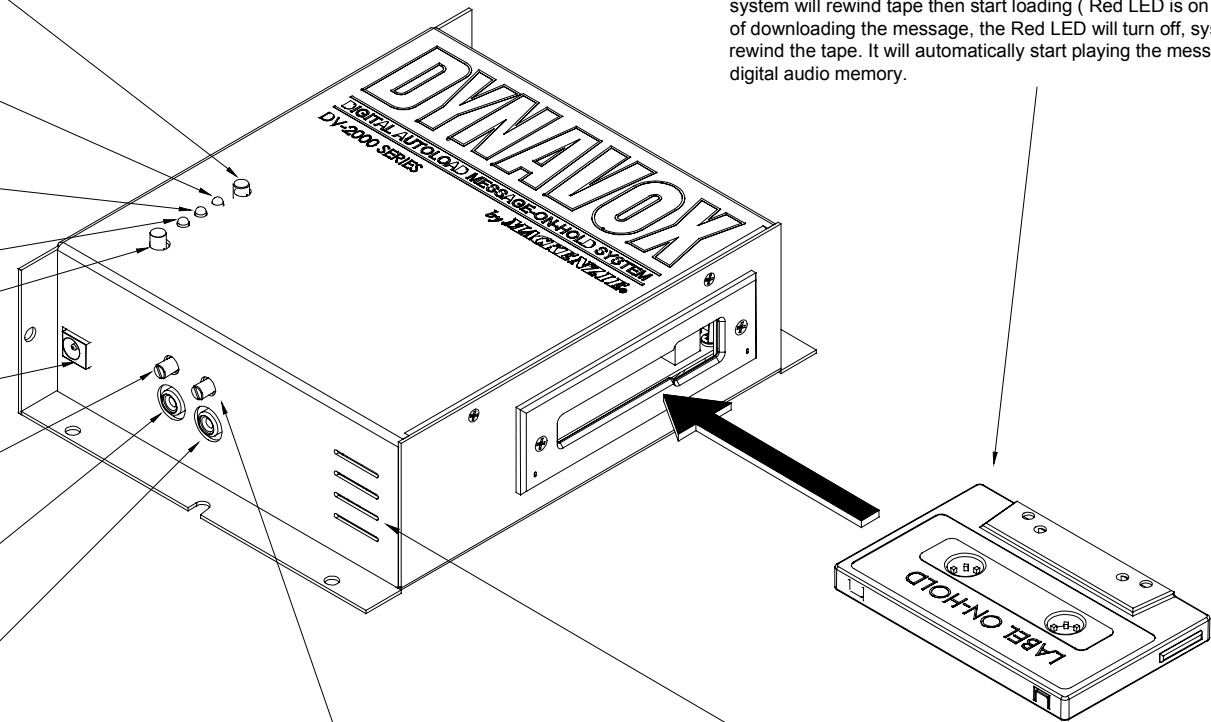

**LEVEL:**

Adjusts the volume to the line level or power audio outputs.

Monitor Speaker